Thermal Solar Systems
S2 SOLAR 2



fiorini

CHECK UPDATED PRICE LIST

go.fiorinigroup.it/pr

S2 SOLAR 2
Solar module

The two-pipe solar station consists of the following components:

Return:
- Flow regulator gauge 20-70 l/min
- high efficiency synchronous solar circulator 0-10V command
- ball valve with non-return valve 18 bar (the non-return
- valve can be left out by turning the handle for 45 degrees) with a thermometer handle (thermometer with blue ring; 0°C-120°C).
- T coupling for the safety unit
- 6 bar safety unit with 0-10 bar manometer - ¾" male connection for expansion vessel. Drain outlet 1"F


Delivery:
- T coupling for well probe holder
- ball valve with non-return valve 18 mbar (the non-return valve can be left out by turning the handle for 45 degrees) with a thermometer handle (thermometer with red ring; 0°C-120°C).
- coupling tube and coupling

Other features:
- EPP insulation box (dimensions: 125x250x400 mm).
- Wall mount set.
- Nominal pressure: 10 bar.
- Continuous temperature: 120°C (brief period: 160°C for 20 sec.).
- External couplings: 22 mm compression coupling and 1"¼ female coupling.
- WILO TOP S 30/10 solar thermal pump (can be closed, does not have to be drained when serviced)
- Power: 195 / 270 / 380 W

Dimensions:
- Couplings: 11/4"
- Wheelbase: 125 mm
- Width with insulation: 285 mm
- Height with insulation: 500 mm



TESTED

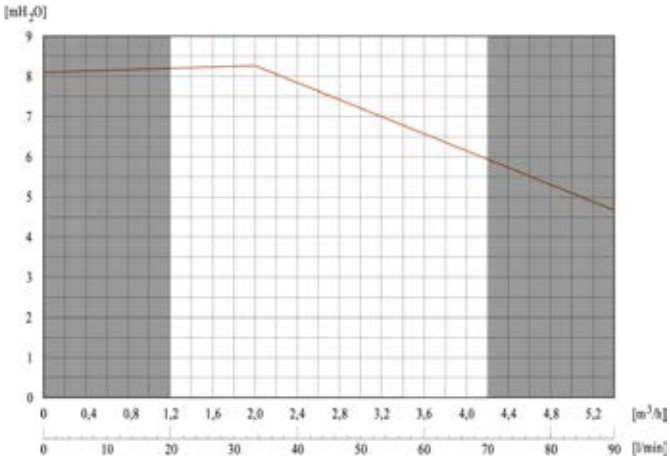

From 30 up to 90m2*
*approximate value, to be verified based on the installation conditions

Code	Model	Flow (l/min)		Potenza min / max W	Price	max. press.	max. temp.
		Min.	Max.				
838110068X	S2 SOLAR2	20	70	8/130		6 bar	120°C(*)



Download additional content

go.fiorinigroup.it/eng/content

fiorini

Fiorini Industries S.r.l.
Ph. +39 0543 723197 – Fax +39 0543 720413
Via Zampeschi 119 – 47122 Forlì (FC) – Italy
www.fiorini-industries.com