Company name:
Created by:
Phone:

Date: 26/10/2026

Qty.	Description
1	**UPM3 AUTO25-70 180 ZZZ**



Note! Product picture may differ from actual product

Product No.: 93370517


UPM3 AUTO is an OEM high-efficiency self-controlled circulator with constant control modes and the unique AUTOADAPT mode.

The product is optimal for underfloor heating, various heating kits or integration in heating systems with constant or minor flow variations.


Company name:
Created by:
Phone:

Date: 26/10/2026

Description	Value
General information:	
Product name:	UPM3 AUTO 25-70 180 ZZZ
Product No:	93370517
EAN number:	5715471595751
Price:	
Technical:	
Maximum head:	70 dm
TF class:	110
Approvals:	CE,VDE
Model:	W
Installation:	
Maximum ambient temperature:	70 °C
Maximum operating pressure:	10 bar
Port-to-port length:	180 mm
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	2 .. 110 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Power input - P1:	5 .. 52 W
Mains frequency:	50 / 60 Hz
Rated voltage:	1 x 230 V
Maximum current consumption:	0.07 .. 0.52 A
Enclosure class (IEC 34-5):	IP44
Thermal protec:	ELEC
Controls:	
Terminal box position:	9H
Others:	
Energy (EEI):	0.20
Net weight:	2.06 kg
Gross weight:	2.55 kg

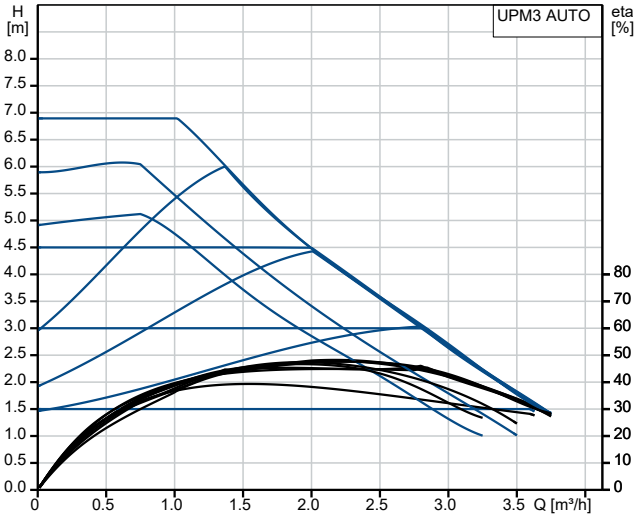


Pumped liquid = Water
Liquid temperature during operation = 20 °C
Density = 998.2 kg/m³

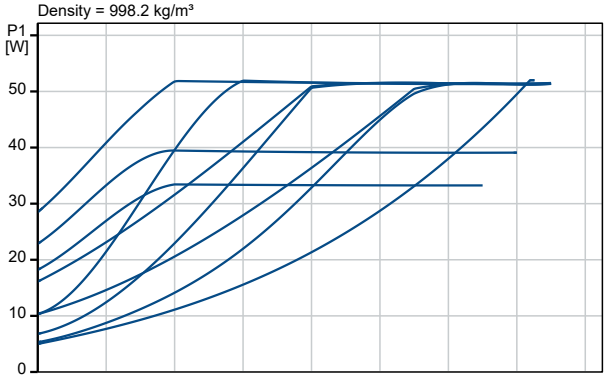


Company name:
Created by:
Phone:

Date: 26/10/2026

93370517 UPM3 AUTO 25-70 180 ZZZ

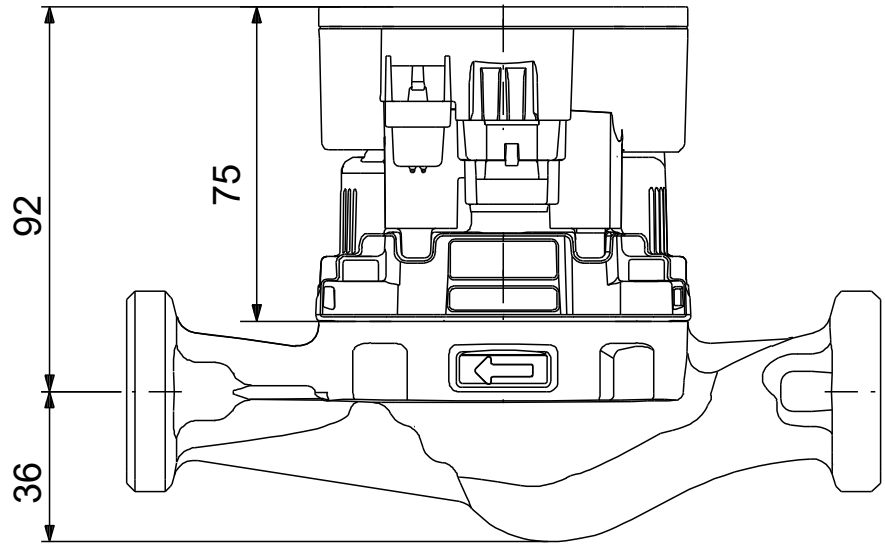

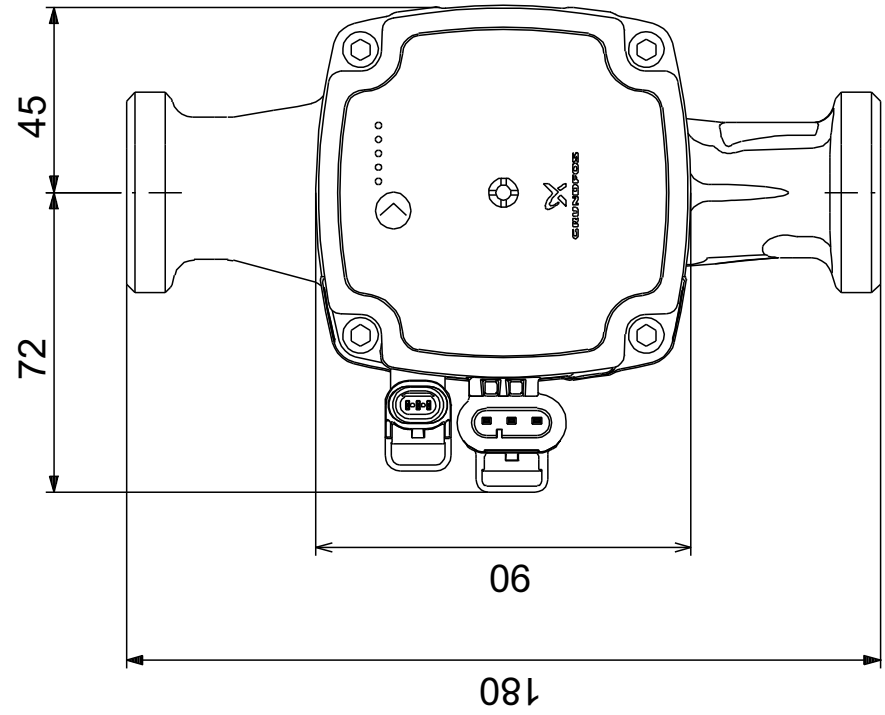

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

GRUNDFOS

Company name:
Created by:
Phone:

Date: 26/10/2026