Company name:
Created by:
Phone:

Date: 26/10/2026

Qty.	Description
1	**UPM10XL AUTO**



Note! Product picture may differ from actual product


Product No.: 93202755

UPM10, UPM20 AUTO is a self-controlled pump with constant control modes and the unique AUTOADAPT mode. The product is optimal for underfloor heating, various heating kits or integration in heating systems with constant or minor flow variations.


Company name:
Created by:
Phone:

Date: 26/10/2026

Description	Value
General information:	
Product name:	UPM10XL AUTO 32-125 180
Product No:	93202755
EAN number:	5715469183571
Price:	
Technical:	
Maximum head:	125 dm
Pump head orientation:	9H
TF class:	110
Approvals:	CE,VDE
Model:	A
Materials:	
Pump housing:	Cast iron
	EN 1561 EN-GJL-150
Impeller:	Composite
Installation:	
Range of ambient temperature:	-20 .. 70 °C
Maximum operating pressure:	10 bar
Type of inlet connection:	BSPP
Size of connection:	32
Port-to-port length:	180 mm
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-20 .. 110 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
P1 min.:	3 W
Max. P1:	180 W
Mains frequency:	50 / 60 Hz
Rated voltage:	1 x 230 V
Minimum current consumption:	0.05 A
Maximum current consumption:	1.5 A
Enclosure class (IEC 34-5):	IPX4D
Thermal protection:	Electrical
Others:	
Energy (EEI):	0.20
Net weight:	3.05 kg
Gross weight:	3.05 kg

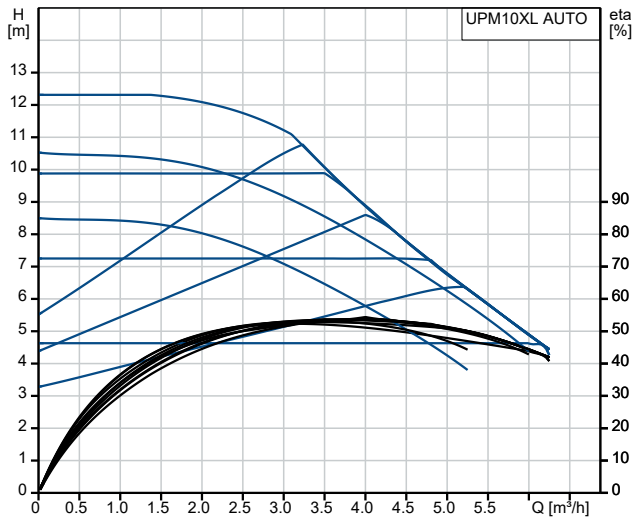


Pumped liquid = Water
Liquid temperature during operation = 20 °C
Density = 998.2 kg/m³

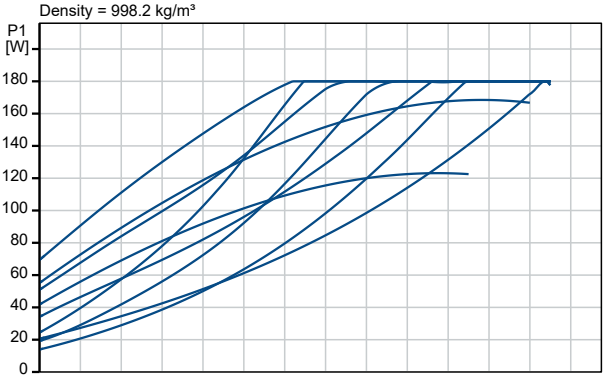


Company name:
Created by:
Phone:

Date: 26/10/2026

93202755 UPM10XL AUTO 32-125 180

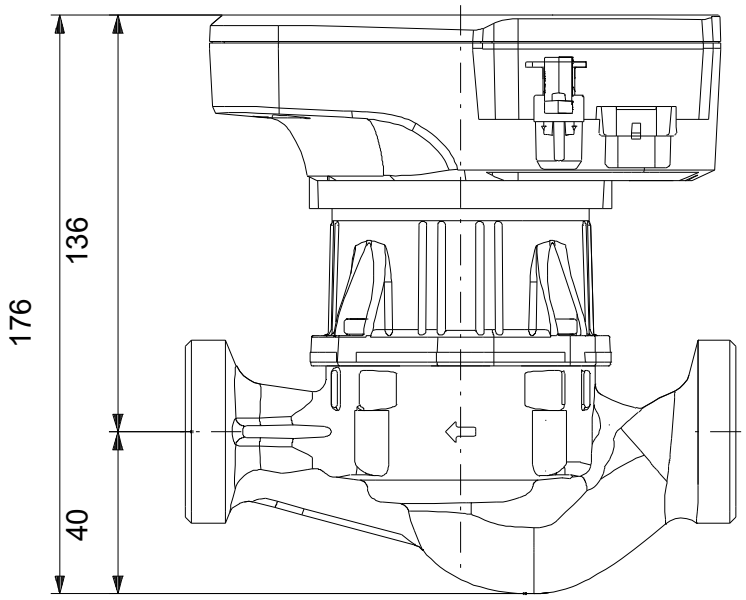

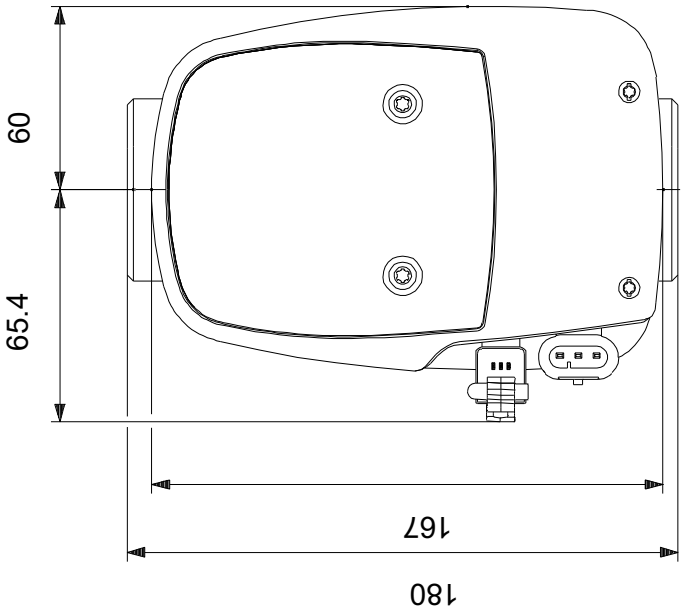

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

GRUNDFOS

Company name:
Created by:
Phone:

Date: 26/10/2026