Removable Exchangers
Water Heaters
BOIL INOX



CHECK UPDATED PRICE LIST

go.fiorinigroup.it/pr

Stainless steel water heater with tube heat exchanger - BOIL INOX

The BOIL INOX range consists of water heaters with tube heat exchanger for the production of domestic hot water. They are available in several capacities, from 200 up to 5000 litres and equipped with Polyester Fiber insulation, external cover in PVC and a magnesium anode for protection against galvanic currents.



TESTED

Materials

The boilers are made from high quality materials such as:

- Tank: AISI 316 stainless steel
- Tube heat exchanger: AISI 316 stainless steel
- Exchanger head: galvanized carbon steel S235 JR

Treatment for internal protection: Pickling and passivation

Insulation

Capacity (l)	Type
from 200 to 5000	Polyester Fiber


Operational limits

Storage		Primary circuit	
max. temperature	max. pressure	max. temperature	max. pressure
95°C	6 bar	110°C	12 bar

Supplied accessories: Magnesium sacrificial anode for all sizes.

Standard accessories: see pag 294

Special versions: see pag 296



Capacity l	Code	Price	Energy label	Vertical Packaging Dimensions cm
200	818040113X		B	70x70x143
300	818040114X		B	80x80x160
500	818040115X		C	90x90x195
750	818040116X		C	100x100x200
1000	818040117X		C	110x110x230
1500	818040118X		C	130x130x240
2000	818040119X		C	150x150x250
2500	818040120X			150x150x280
3000	818040121X			150x150x300
4000	818040122X			170x170x305
5000	818040123X			190x190x310




Integration with AQUAFAST


See page 212

Stainless steel water heater with tube heat exchanger - BOIL INOX

200 ≤ cap. ≤ 300

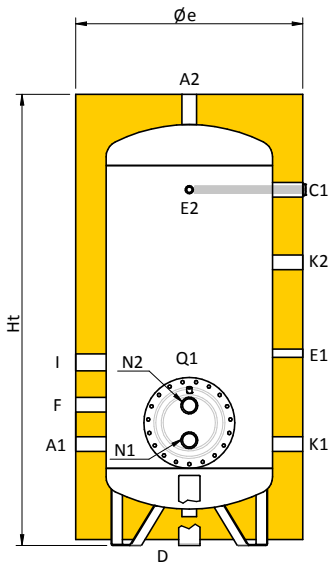

500 ≤ cap. ≤ 5000

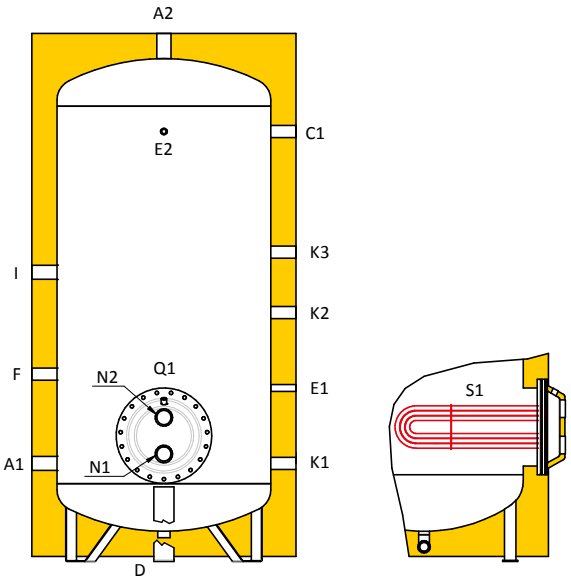

Couplings legend

A1	DHW inlet
A2	DHW outlet
C1	Anode
D	Drain
E1	Probe / Thermometer
E2	Probe / Thermometer
F	Recirculation
I	Electrical resistor
K1	Auxiliary
K2	Auxiliary
K3	Auxiliary
N1	Lower exchanger outlet
N2	Lower exchanger inlet
Q1	Inspection hole
S1	Lower exchanger

Couplings chart

Cap. l	A1 inch	A2 inch	C1 inch	D inch	E1 inch	E2 inch	F inch	I inch	K1 inch	K2 inch	K3 inch	N1 inch	N2 inch	Q1 (Øext/Øint) mm
200	1"1/4	1"1/4	1"1/4	1"1/4	1/2"	1/2"	1"1/4	1"1/2	1"1/4	1"1/4	-	1"	1"	Ø300/Ø220
300	1"1/4	1"1/4	1"1/4	1"1/4	1/2"	1/2"	1"1/4	1"1/2	1"1/4	1"1/4	-	1"	1"	Ø300/Ø220
500	1"1/4	1"1/4	1"1/4	1"1/4	1/2"	1/2"	1"1/4	1"1/2	1"1/4	1"1/4	1"1/4	1"	1"	Ø300/Ø220
750	1"1/2	1"1/2	1"1/4	1"1/4	1/2"	1/2"	1"1/4	1"1/2	1"1/4	1"1/4	1"1/4	2"	2"	Ø380/Ø300
1000	1"1/2	1"1/2	1"1/4	1"1/4	1/2"	1/2"	1"1/4	1"1/2	1"1/4	1"1/4	1"1/4	2"	2"	Ø380/Ø300
1500	1"1/2	1"1/2	1"1/4	1"1/4	1/2"	1/2"	1"1/4	1"1/2	1"1/4	1"1/4	1"1/4	2"	2"	Ø380/Ø300
2000	2"	2"	1"1/4	1"1/4	1/2"	1/2"	1"1/4	1"1/2	1"1/4	1"1/4	1"1/4	2"	2"	Ø430/Ø350
2500	2"1/2	2"1/2	1"1/4	1"1/4	1/2"	1/2"	1"1/4	1"1/2	1"1/4	1"1/4	1"1/4	2"	2"	Ø430/Ø350
3000	3"	3"	1"1/4	1"1/4	1/2"	1/2"	1"1/4	1"1/2	1"1/4	1"1/4	1"1/4	2"	2"	Ø430/Ø350
4000	3"	3"	1"1/4	1"1/4	1/2"	1/2"	1"1/4	1"1/2	1"1/4	1"1/4	1"1/4	2"	2"	Ø430/Ø350
5000	3"	3"	1"1/4	1"1/4	1/2"	1/2"	1"1/4	1"1/2	1"1/4	1"1/4	1"1/4	2"	2"	Ø430/Ø350

Size chart


Cap. l	Øe mm	Ht mm	R* mm	A1 mm	C1 mm	E1 mm	E2 mm	F mm	I mm	K1 mm	K2 mm	K3 mm	N1 mm	N2 mm	Q1** mm
200	650	1410	1535	295	1135	595	1135	425	540	295	915	-	305	425	365
300	750	1490	1650	335	1175	635	1175	465	605	335	935	-	345	465	405
500	850	1770	1945	350	1420	650	1420	650	935	350	950	1190	360	480	420
750	990	1810	2045	370	1440	670	1440	700	1150	370	990	1210	407,5	552,5	480
1000	1050	2100	2330	390	1710	690	1710	745	1150	390	990	1230	427,5	572,5	500
1500	1250	2235	2555	490	1800	795	1800	795	1205	490	1090	1330	517,5	662,5	590
2000	1450	2315	2725	525	1835	830	1835	830	1240	525	1125	1365	555	745	650
2500	1400	2640	2895	560	2145	860	2145	845	1545	560	1160	1400	575	765	670
3000	1450	2850	3155	565	2340	790	2340	840	1740	565	1040	1405	585	775	680
4000	1600	2920	3295	590	2370	890	2370	860	1770	590	1190	1430	610	800	705
5000	1800	2960	3425	600	2375	900	2375	875	1775	600	1200	1440	620	810	715

R*: reversal quota

Q1**: Height from inspection hole center to the ground

Technical information for BOIL and BOIL INOX series


		DHW production TiDHW = 10°C						Exchanger		
Capacity	Ti	TuDHW= 45°C		TuDHW = 60°C		Ta = 50°C TuDHW = 45°C	Ta = 60°C TuDHW = 45°C	Surface area	Capacity	Nominal flow
l	°C	l/h (a)	kW (b)	l/h (c)	kW (d)	l/10 min. (e)	l/10 min. (f)	m²	l	mc/h
200	70	241	9,8	119	4,9	258	315	0,5	2	0,5
	80	300	12,2	169	6,9	266	323			0,6
	90	362	14,7	214	8,7	273	330			0,7
300	70	364	14,8	181	7,4	384	470	0,75	2,8	0,7
	80	453	18,4	252	10,3	395	480			0,8
	90	544	22,1	322	13,1	405	491			1
500	70	482	19,6	240	9,8	620	763	1	3,6	0,9
	80	602	24,5	336	13,7	632	775			1,1
	90	580	23,6	343	14	644	787			1,1
750	70	723	29,4	358	14,6	983	1212	1,5	5,9	1,3
	80	902	36,7	506	20,6	1001	1229			1,6
	90	1084	44,1	642	26,2	1018	1247			1,9
1000	70	964	39,2	480	19,6	1224	1510	2	7,2	1,7
	80	1204	49	675	27,5	1245	1531			2,2
	90	1445	58,8	857	34,9	1266	1552			2,6
1500	70	1445	58,8	728	29,7	1837	2266	3	10,9	2,6
	80	1806	73,5	1020	41,6	1869	2297			3,2
	90	2168	88,2	1292	52,6	1899	2328			3,8
2000	70	1927	78,4	976	39,8	2421	2992	4	14,7	3,4
	80	2408	98	1368	55,7	2454	3026			4,3
	90	2890	117,6	1731	70,5	2488	3059			5,1
2500	70	2408	98	1232	50,2	3014	3728	5	18,5	4,3
	80	3010	122,5	1722	70,1	3053	3767			5,3
	90	3612	147	2178	88,7	3091	3805			6,4
3000	70	2890	117,6	1478	60,2	3577	4434	6	22	5,1
	80	3612	147	2066	84,1	3614	4471			6,4
	90	4335	176,4	2613	106,4	3650	4507			7,6
4000	70	3853	156,8	2020	82,3	4775	5918	8	30,1	6,8
	80	4816	196	2802	114,1	4824	5967			8,5
	90	5780	235,2	3530	143,7	4872	6015			10,2
5000	70	4816	196	2978	121,2	5938	7366	10	36,4	8,5
	80	6020	245	4099	166,9	5990	7419			10,6
	90	7224	294	5138	209,2	6042	7470			12,7

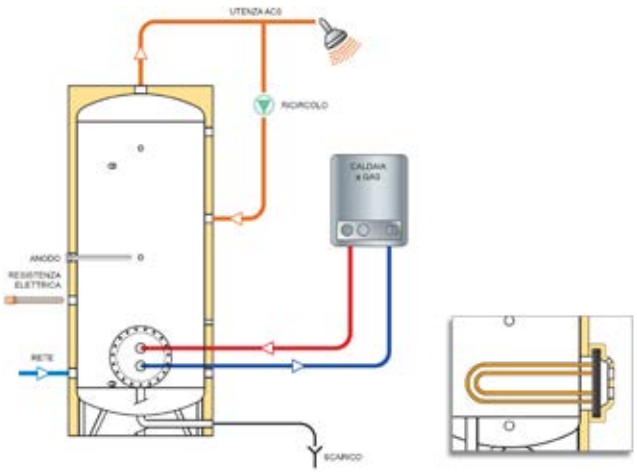


- a continuous DHW flow with TuDHW= 45°C
- b exchanger power with TuDHW=45°C
  c continuous DHW flow with TuDHW= 60°C
- d exchanger power with TuDHW=60°C
- e amount of DHW at 45°C in the first 10 min. with a storage temperature of 50°C
- f amount of DHW at 45°C in the first 10 min. with a storage temperature of 60°C
- Exchanger capacity: 6,40 L/m²

Technical information for BOIL and BOIL INOX series

Water only

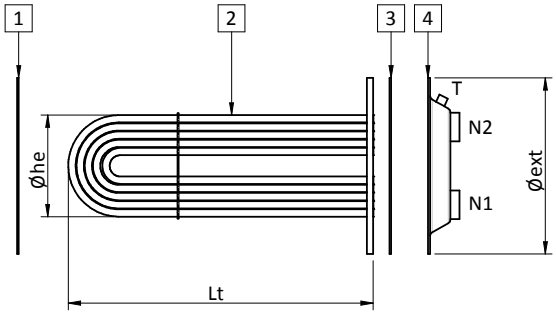

Steam only

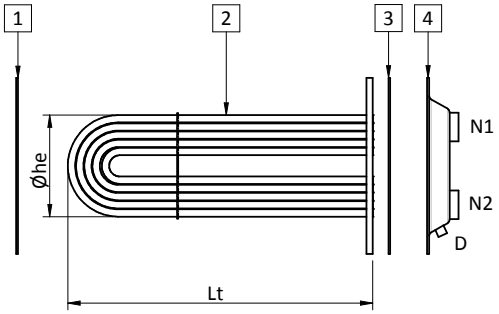

Couplings legend


D	Drain
N1	Exchanger inlet/outlet
N2	Exchanger inlet/outlet
T	Vent
1	Gasket without cross-beam
2	Bundle tube heat exchangers
3	Gasket with cross-beam
4	Head


Technical information tube heat exchanger

Surf. m²	Power* kW	Lt mm	Øext mm	Øhe mm	N1 inch	N2 inch	T, D inch	Z1 mm	Z2 mm	n° holes	Vol. l	dp mca
0,5	12,2	460	300	166	1"	1"	3/8"	120	262	16	1,84	0,65
0,75	18,4	445	300	202	1"	1"	3/8"	120	262	16	2,44	0,65
1	24,5	475	300	202	1"	1"	3/8"	120	262	16	3,23	0,7
1,5	36,7	600	380	270	2"	2"	3/8"	145	345	19	5,36	0,75
2	49	600	380	270	2"	2"	3/8"	145	345	19	6,51	0,8
3	73,5	720	380	278	2"	2"	3/8"	145	345	19	9,8	0,9
4	98	750	430	316	2"	2"	3/8"	190	395	22	13,2	1
5	122,5	780	430	324	2"	2"	3/8"	190	395	22	16,68	1,1
6	147	895	430	324	2"	2"	3/8"	190	395	22	19,2	1,2
8	196	1250	430	324	2"	2"	3/8"	190	395	22	27	1,3
10	245	1510	430	324	2"	2"	3/8"	190	395	22	32,7	1,4


Pressure loss tube heat exchanger

Exchanger surface 0,5 - 1 m²

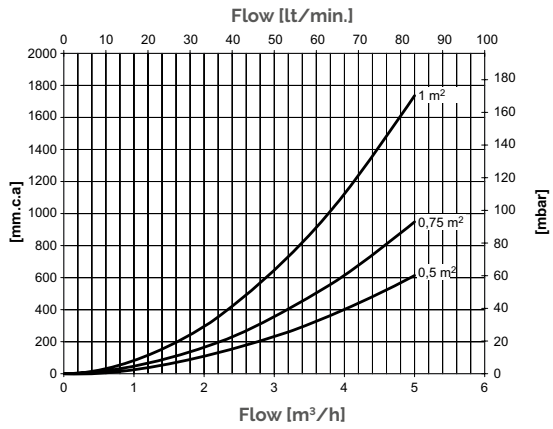


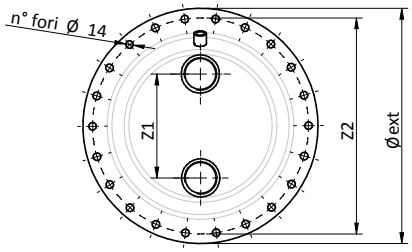

Exchanger surface 1,5 - 3 m²

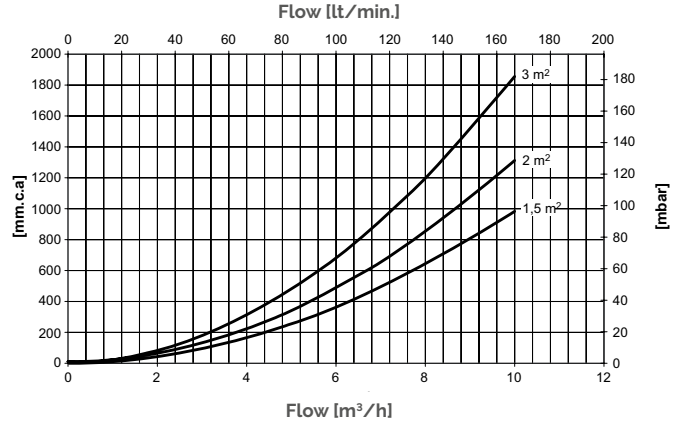

Exchanger surface 5 - 10 m²

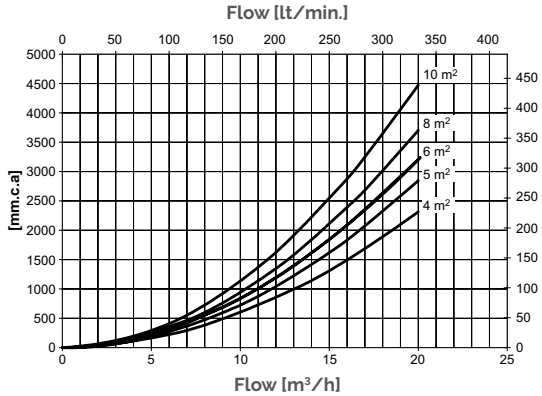



Download additional content

go.fiorinigroup.it/eng/content

fiorini

Fiorini Industries S.r.l.
Ph. +39 0543 723197 – Fax +39 0543 720413
Via Zampeschi 119 – 47122 Forlì (FC) – Italy
www.fiorini-industries.com